

# Guidelines for Authors of Papers Published in Proceedings of IIT.SRC 2009

Ján NOVÁK, Martin KOVÁČ\*

*Slovak University of Technology*  
*Faculty of Informatics and Information Technologies*  
*Ilkovičova 3, 842 16 Bratislava, Slovakia*  
novak@fiit.stuba.sk

**Abstract.** All IIT.SRC L<sup>A</sup>T<sub>E</sub>X contributions are expected to use the `iitsrc` class. This document was typeset with that class and as such it is solely a demo. It is a supplement to the `iitsrc.pdf` document which describes all the (boring) things in detail.

## 1 Basics

We do not hope to give you as extensive information as other sources (such as [7]). On Linux you can get fairly complete information about L<sup>A</sup>T<sub>E</sub>X commands via:

```
info latex
```

Here we only make few notes concerning obvious things you probably already know. You should properly divide your text into several sections (via `\section` and perhaps also `\subsection` commands.) Do not change the font family and font sizes defined by the `iitsrc` class. These default values should be common for all articles. If you want to emphasize something (perhaps a newly introduced notion or such), use the `\em` command. Usage of the bold face (the `\bf` command) is very unusual in normal L<sup>A</sup>T<sub>E</sub>X text. It is not advised to use it explicitly. End of a paragraph is indicated in the source code by an empty line. You can use usual environments such as `itemize` or `enumerate` to create bulleted or enumerated lists.

---

\* Bachelor / Master / Doctoral study programme in field: Informatics / Computer engineering / Software Engineering / Information Systems / Applied Informatics / Artificial intelligence

Supervisor: Professor / Assoc. Professor / Dr. XXXX YYYYY, Institute of Applied Informatics / Institute of Informatics and Software Engineering / Institute of Computer Systems and Networks, Faculty of Informatics and Information Technologies STU in Bratislava

## 2 Mathematical formulæ, equations, figures and tables

The `equation` environment can be used for typesetting numbered equations.

$$e^{i\pi} + 1 = 0 \tag{1}$$

It was produced with a following commands:

```
\begin{equation}
e^{i\pi}+1=0
\end{equation}
```

If you want later to refer to your equation, it is wise to accompany your equation with a symbolic label, for example as below:

```
\begin{equation}
\label{eq:contestwinner}
e^{i\pi}+1=0
\end{equation}
```

Now you can refer to it—the Equation 1—by its symbolical name rather than a concrete number. This is advantageous because the order of equations might change over time. This reference can be typeset as follows:

```
Equation~\ref{eq:contestwinner}
```

There is also `equation*` environment which enables you to typeset unnumbered equation.

There are also other useful L<sup>A</sup>T<sub>E</sub>X commands and environments such as `eqnarray`. For example:

$$x \ll y_1 + \cdots + y_n \tag{2}$$

$$x \leq z \tag{3}$$

It enables you to put (non-)equalities nicely one below the other pleasantly aligned. The above example was typeset by a following command:

```
\begin{eqnarray}
x & \ll & y_1 + \cdots + y_n \\
x & \leq & z
\end{eqnarray}
```

If you need to typeset a table such as Table 1 you can do it as follows:

Table 1. Specification of a strategy  $s(a)$  of agent  $a$ .

	penalty of agent $a$	penalty of agent $b$	movement of agent $a$
1	$p(a) = 0$	$p(b) = 0$	$S_1(a)$
2	$p(a) = 0$	$p(b) > 0$	$S_2(a)$
3	$p(a) > 0$	$p(b) = 0$	$S_3(a)$
4	$p(a) > 0$	$p(b) > 0$	$S_4(a)$

```

\begin{table}[ht]
  \caption{Specification of a strategy
    $s(a)$ of agent $a$}
  \label{tab:strategy}
  \begin{center}
    \begin{tabular}{|c|c|c|c|}
      \hline
      & penalty & penalty & movement \\
      & of agent a & of agent b & of agent a \\
      \hline
      1 & $p(a)=0$ & $p(b)=0$ & $S_1(a)$ \\
      2 & $p(a)=0$ & $p(b)>0$ & $S_2(a)$ \\
      3 & $p(a)>0$ & $p(b)=0$ & $S_3(a)$ \\
      4 & $p(a)>0$ & $p(b)>0$ & $S_4(a)$ \\
      \hline
    \end{tabular}
  \end{center}
\end{table}

```

If you need to include a figure to your document, such as Figure 1, you can do it as follows:

```

\begin{figure}[h]
  \begin{center}
    \includegraphics{tree}
    \caption{Fractal tree}
    \label{fig:fractaltree}
  \end{center}
\end{figure}

```

If you process your document with  $\text{\LaTeX}$  you will have to provide all your figures as EPS (Encapsulated Postscript) files. If you process your document with  $\text{PDF}\text{\LaTeX}$  you will have to provide all your figures as PDF files. Several graphical programs are able to export pictures to these two formats. If possible, please use a vector editor. Please do not convert bitmaps into EPS or PDF. The printed results are then usually ugly.

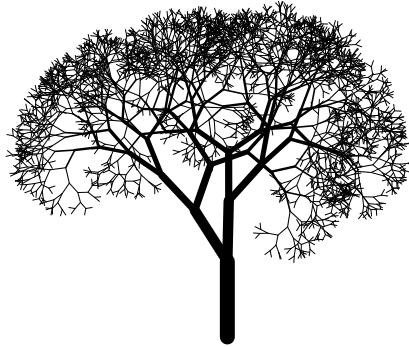


Figure 1. Fractal tree.

Note that since you have given a figure a symbolic name (in this case `fig:fractaltree`), you can refer to this figure as follows:

`Figure~\ref{fig:fractaltree}`

This is advantageous because regardless of the fact how you reorder your figures in the document, the references to them will never break unless you change their symbolical name. Do not forget to describe your figure with a `\caption` command. Due to technological constraints, included figures should be

- black-and-white,
- minimal thickness of lines should be at least 0.25 mm,
- do not use half-tones; use raster instead to express various degrees of gray.

If you need to insert a pseudo code of an algorithm into the paper, you can use the `algorithms` package for  $\LaTeX$ . Documentation and example in  $\TeX$  file can be found in the zip file available on <http://texcatalogue.sarovar.org/entries/algorithms.html> Please do not refer to various parts of your document via page numbers. Instead, give a symbolic name to your sections (via `\label` command) and refer to your sections via `\ref` command. Please leave the `\editpages` command from a “minimal article source code” in place. Its purpose is related to combining particular articles to a single volume and if you delete it, someone will have later add it back. So if you leave it where it is, you will save yours someone else’s time.

### 3 The bibliography

$\LaTeX$  document usually creates bibliography references via `BIB $\TeX$` . Basic information about `BIB $\TeX$`  is in [7]. You are encouraged to use it too. Bibliography references are usually inserted in the document as follows:

```
\bibliography{common}
\bibliographystyle{iitsrc}
```

Be sure to use the `iitsrc` style as suggested above. We used `BIBTEX` also for typesetting bibliographic references cited within this document. So you can look at the source code (`demo.tex`) and the compilation instructions (`Makefile`) to see how it was generated. The `common.bib` file contains the bibliography resources we collected over time. There are various entries in the form:

```
@ARTICLE{OwickiGries76b,
  AUTHOR = {S. Owicki and D. Gries},
  TITLE = "Verifying Properties of Parallel Programs,
          an axiomatic approach",
  JOURNAL = cacm,
  VOLUME = 19,
  NUMBER = 5,
  PAGES = {279-285},
  MONTH = may,
  YEAR = 1976
}
```

Each such entry contains logical information about the particular source of information. You can add your sources of information therein. Some information about how to do that can be found in [7] (Appendix B). `BIBTEX` finds out which ones you cite within your document and format the data it finds in your `*.bib` (in this case `common.bib`) file according to the instructions in the `*.bst` (in this case `iitsrc.bst`) file. All you have to do within your document is to `\cite{key}` them.

Other example cited sources: [1–6, 8–14]

*Acknowledgement:* Here you should mention the names of grants which funded the work on this article. As defined by the particular grant.

## References

- [1] ISO/IEC 9899:TC2 Committee Draft, 2005.
- [2] Caromel, D., Henrio, L., Serpette, B.: Asynchronous Sequential Processes. Technical report, INRIA Sophia Antipolis, 2003, RR-4753.
- [3] Czarnecki, K.: Chap. Intentional programming. In: *Generative Programming*. Addison-Wesley, 2000, pp. 503–566.
- [4] Friedman, A.D., Menon, P.R.: *Theory and Design of Switching Circuits*. Computer Science Press, Inc, 1975.
- [5] Henessy, J., Patterson, D.: *Computer Organization and Design: The Hardware/Software Interface*. Morgan Kaufmann Publishers, San Mateo California, 1994.

- [6] Henrio, L.: *Asynchronous Object Calculus: Confluence and Determinacy*. PhD thesis, Université de Nice-Sophia Antipolis, 2003.
- [7] Lamport, L.: *A Document Preparation System  $\text{\LaTeX}$ , User's Guide and Reference Manual*. Addison Wesley, 1986.
- [8] Leiserson, C.E., et al.: The Network Architecture of the Connection Machine CM-5. Technical report, Thinking Machines Corporation, 1994.
- [9] Manna, Z., Pnueli, A.: Verification of concurrent programs: a temporal proof system. In: *Proceedings of the Fourth School on Advanced Programming*, Amsterdam, 1982, pp. 163–255.
- [10] Misra, J., Chandy, K.: Proofs of networks of processes. *IEEE Transactions on Software Engineering*, 1981, vol. 7, no. 7, pp. 417–426.
- [11] Owicki, S., Gries, D.: Verifying properties of parallel programs: an axiomatic approach. *Communications of the ACM*, 1976, vol. 19, no. 5, pp. 279–285.
- [12] SWIG: The SWIG Development Tool. <http://www.swig.org>, [Online; accessed January 15th, 2008].
- [13] Vardhan, A., et al.: Distributed Garbage Collection of Active Objects: A Transformation And Its Applications to Java Programming. Master's thesis, 1998.
- [14] Widom, J., Panangaden, P.: Expressiveness Bounds for Completeness in Trace-Based Network Proof Systems. In: *CAAP '88: Proceedings of the 13th Colloquium on Trees in Algebra and Programming, Lecture Notes in Computer Science 209*. Springer-Verlag, Berlin, 1988, pp. 200–214.